





## WHAT'S INCLUDED

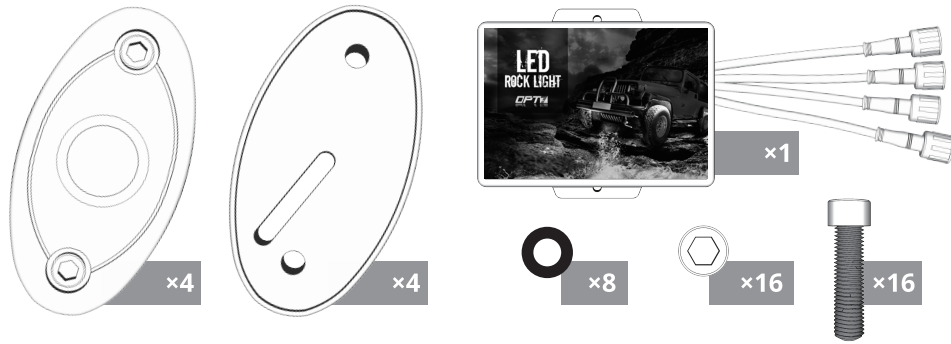


## TWO WAYS TO MOUNT

### FLAT INSTALL WITHOUT RUBBER MOUNT



1


### ROUND INSTALL WITH RUBBER MOUNT



2

## ROCK LIGHT POD FITMENT STEPS


Force power wire from pods through the rubber mounts



\*Very snug fit so you will have to force the end cap through the hole

1

Make sure the pods are flush with the rubber mounts




2

Begin inserting the screws into the screw holes




3

Now you're ready to mount the pods onto your vehicle



4

Once the pods are mounted, connect each pod power line to the fuse box power line ends and tighten the caps together with your fingers

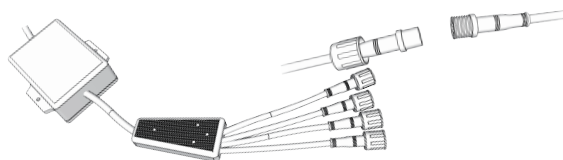

5

Remember, the rock light pods become extremely hot when in use, so you will not want to install the pods or control box underneath or on any sensitive material or power lines under your vehicle for safety.

## WHERE TO INSTALL



### INSTALLATION STEPS

1. Choose the mounting locations for each of the LED pods and the control box. Please refer to your vehicle's owner's manual for safe areas to install additional lighting and wiring.
2. Determine where the wires will run through. If needed, drill a hole(s) for the wire connector to pass through.
3. Mark and begin drilling each mounting hole with a 5/32" drill bit.
4. Install the LED Pods by themselves for a flat install or with the Rubber Mounting Pads for rounded surfaces.
5. Insert the two 25mm Screws through the LED Pod screw holes and Rubber Mounting Pad.
6. Secure the Screw and Pods with the Washers and Nuts to install flush with the drilled holes.
7. Secure the Pods by tightening the Screws for a snug fit away from any wiring or moving parts. Caution: The Pods become very hot during use, which can cause severe damage to any electrical, rubber, or moving parts that are exposed and too close to your Pods. Keep Pods away from any parts that can be damaged by extreme heat exposure.
8. Connect all of the Pod Cables to the Splitter Cable and secure by screwing locking the collars from the Splitter Cable. Secure the Caps by tightening the end connections with your fingers.
9. Connect both sets of Splitter Cable input wires to the vehicle electrical system using additional power wire and fuse with fuse holder. Red is positive (+). Black is negative (-).
10. Once the Pods and Control Box electrical wiring are all safely connected to your vehicle's electrical system, you can now begin using the Rock Light Pods with the Bluetooth App on your Smartphone. Feel free to share a review of your installation with info about your exact off-road vehicle so other customers understand too! Rock on!


### TOOLS REQUIRED

- 2.5mm Allen wrench
- 7mm wrench/socket
- 5/32 inch drill bit

### FRONT

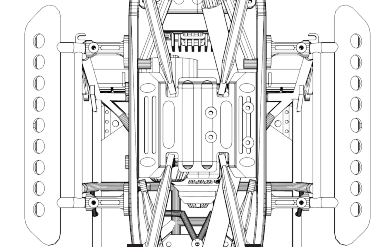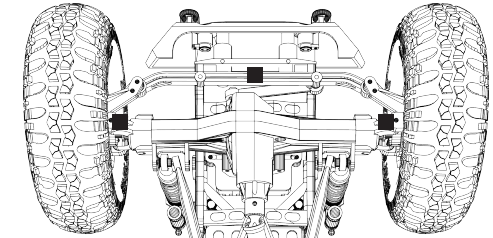

### REAR

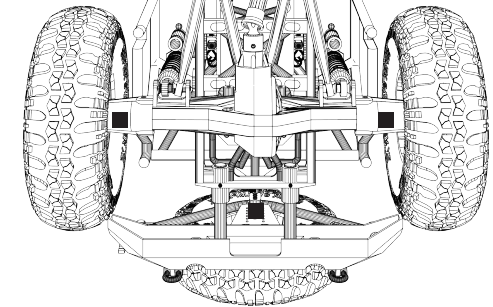

■ Rock Light Pods Recommended Locations