

AURA™

Underbody White LED Lighting Kit

INSTALLATION GUIDE


MAIN COMPONENTS




RIGID LIGHT BARS 2×48" (TWO-SECTION MOVABLE 24")




RIGID LIGHT BARS 2×36" (TWO-SECTION MOVABLE 18")

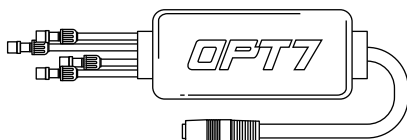


AURA CONTROL BOX



HAND HELD REMOTE




HARDWIRE POWER HARNESS



INCLUDES:
Adhesive booster, Self-Tapping
Screws, Velcro, and Zip ties

MOUNTING KIT

INSTALLATION

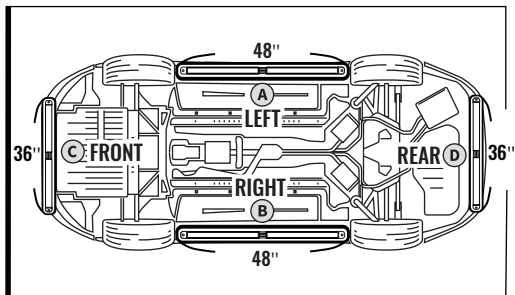


STEP 1

Decide where to locate the control box and ensure wiring has enough length for light bars to be installed in desired location.

IMPORTANT:

The control box is waterproof, but it should still be installed in a safe area of the vehicle. Please avoid installing it in the engine bay or on heated surfaces.

As shown below, connect all the LED bars to the control box with the included extension cables.

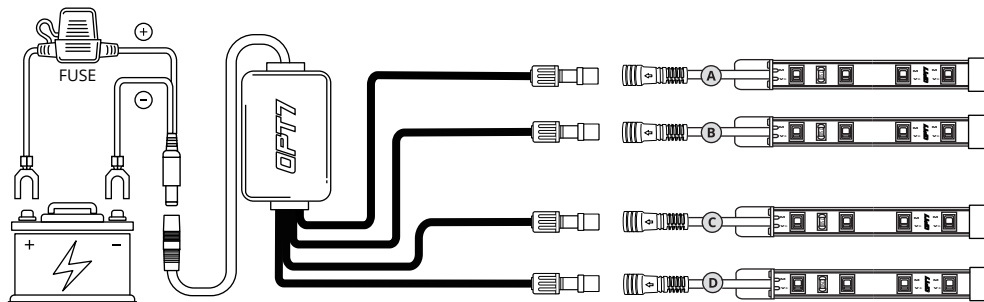

The extension wires are pre-attached to the LED bars. Before installation, lay out all the LED bars according to your plan to ensure a successful setup.

- A 1 x 48" (two-section movable 24") LED Bar + 8ft extension wire
- B 1 x 48" (two-section movable 24") LED Bar + 8ft extension wire
- C 1 x 36" (two-section movable 18") LED Bar + 8ft extension wire
- D 1 x 36" (two-section movable 18") LED Bar + 18ft extension wire




WARNING

Please ensure that the LED bars or strips/control box/wiring all are mounted in areas where will not exceed 85°C or 185°F.

INSTALLATION

⚠ IMPORTANT ⚠


**BE SURE TO CONFIRM THE CORRECT DIRECTION OF THE ARROW!!
TO AVOID PRODUCT DAMAGE DUE TO INCORRECT INSTALLATION.**

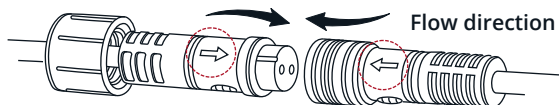

CORRECT INSTALLATION



Note the
direction of
the arrows

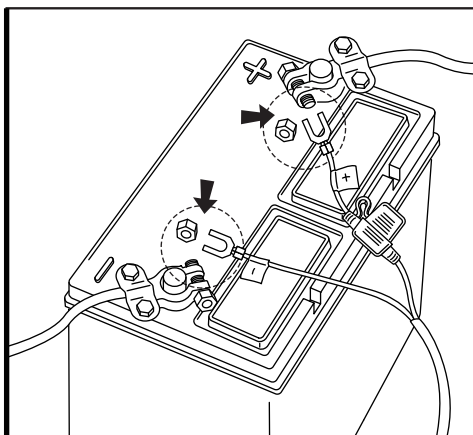


| HOW TO CONNECT POWER HARNESS TO YOUR VEHICLE

- Connect the Red wire (+) of power harness to the vehicle battery's positive terminal.
- Connect the Black wire (-) of power harness to the vehicle battery's negative terminal or an unpainted area on your vehicle's frame.



WARNING


Please ensure that the LED bars or strips/control box/wiring all are mounted in areas where will not exceed 85°C or 185°F

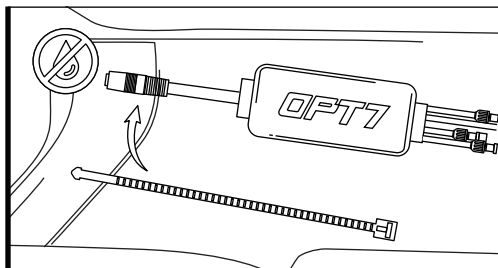

| STEP 3


Secure Control box in desired location with Velcro or zip ties.

INSTALLATION

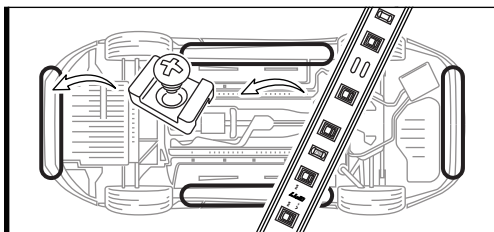


STEP 4

Mount brackets to secure the strip first.

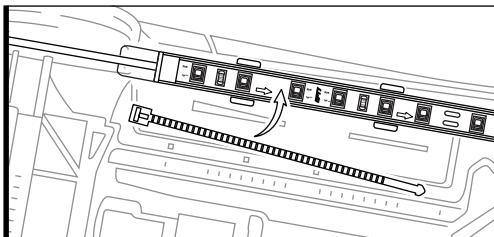

STEP 5

Secure the light bars using the zip ties to tie all the wiring away from the moving components.

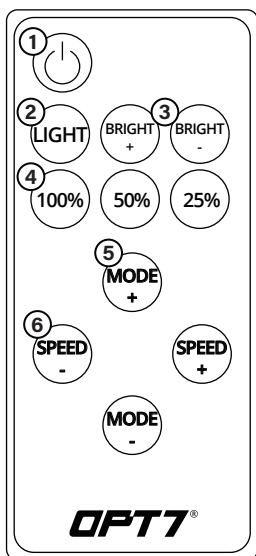

STEP 6


Using the included E-Z Remote, select your desired mode, flashing speed, brightness.

- 1 | Power-ON/OFF
- 2 | Switch dynamic and static modes
- 3 | Brightness +/- **11 Levels**
- 4 | Brightness 100%/50%/25%
- 5 | Mode +/- **10 Mode**
- 6 | Speed +/- **11 Levels**

IMPORTANT:

Pressing the BRIGHT +/- button in dynamic mode will switch to static mode.
Pressing the MODE +/- button in static mode will switch to dynamic mode.

NOTE: When you use this product, keep it within 10m/33ft as much as possible.

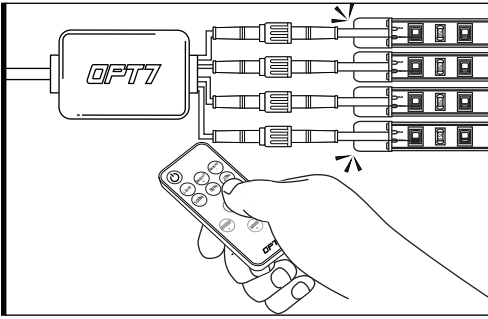

HOW TO PAIR THE REMOTE?

Pair the Device:

To pair the remote, connect the control box to power, point the remote at it, then press and hold the SPEED + and SPEED - buttons until the LED strip flashes three times, indicating a successful connection.

DISCLAIMER

OPT7 Lighting is not liable for damages or personal injuries while installing this product. The Installation Guide is intended as assistance to reduce setup time. OPT7 Lighting assumes no responsibility for improper installation.

If you are unfamiliar with your vehicle or inexperienced with aftermarket upgrades, please seek professional assistance.

OPT7 recommends installation for safety and guidance.

Modified installations or installation recommendations not specified by OPT7 Lighting will void product warranty.