



AURATM PLUS DREAMCOLOR UNDERGLOW FLEXIBLE

INSTALLATION GUIDE

MAIN COMPONENTS






FLEXIBLE LIGHT STRIP 36"×2 + 48"×2



HARDWIRE POWER HARNESS




CONTROL BOX (SCAN QR CODE FOR APP USER GUIDE)



INCLUDES

WIRE MOUNTS,
SELF-TAPPING SCREWS,
BOOSTER, VELCRO, ZIP TIES

MOUNTING KIT

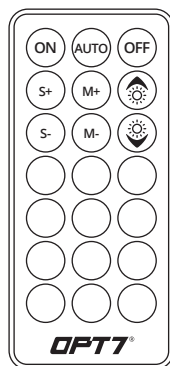


HAND HELD REMOTE

INSTALLATION

STEP 1

Inspect to ensure all contents are included and power the unit to test the kit is working properly with the power adapter provided.

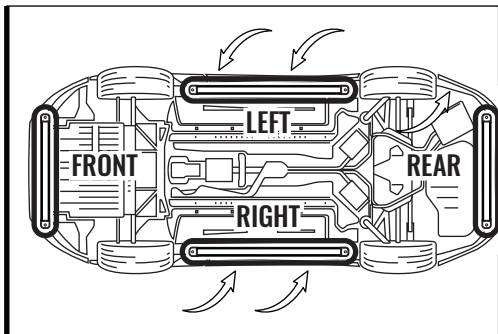


STEP 2

Determine where to locate the control box and ensure wiring has enough length for light strips to be installed in desired location.

IMPORTANT:


The control box is waterproof, but it should still be installed in a safe area of the vehicle. Please avoid installing it in the engine bay or on heated surfaces.

As shown below, connect all the LED strips to the control box.

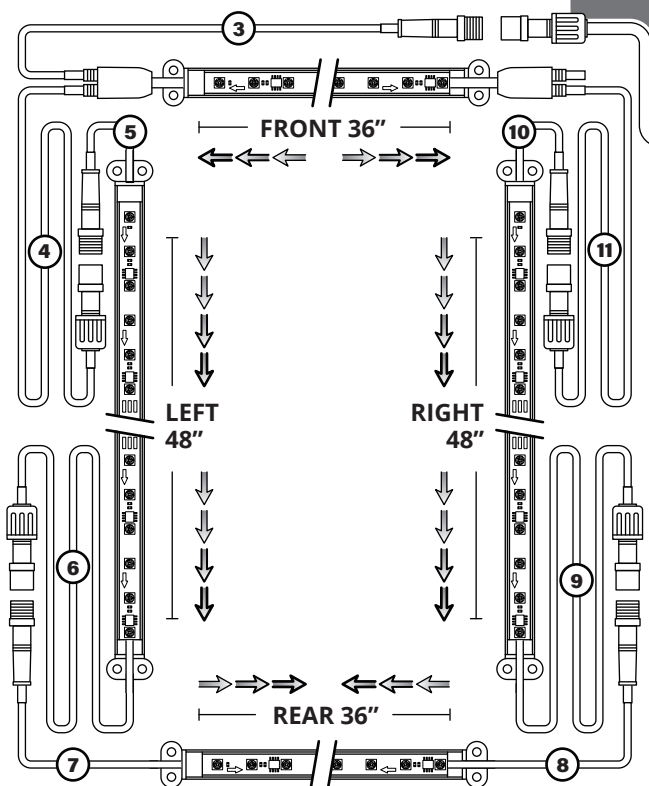


NOTE

Make sure that the arrow marks are set according to the flow direction on the diagram.

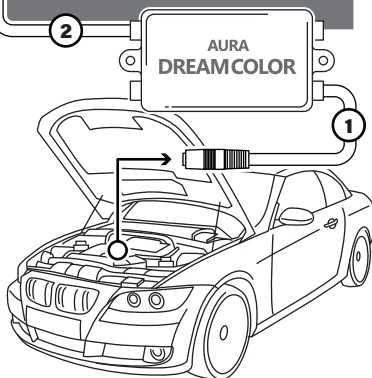

- 1 L=5.9 in w / DC 12V connector
- 2 L=4.7 in w / 3P-Female connector
- 3 L=118.1 in w / 3P-Male connector
- 4 L=98.4 in w / 3P-Female connector
- 5 L=11.8 in w / 3P-Male connector
- 6 L=98.4 in w / 3P-Female connector
- 7 L=11.8 in w / 3P-Male connector
- 8 L=11.8 in w / 3P-Male connector
- 9 L=98.4 in w / 3P-Female connector
- 10 L=11.8 in w / 3P-Male connector
- 11 L=98.4 in w / 3P-Female connector

INSTALLATION

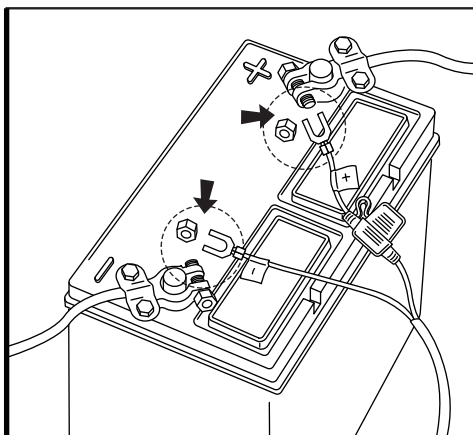


HOW TO CONNECT POWER HARNESS TO YOUR VEHICLE

- Connect the Red wire (+) of power harness to the vehicle battery's positive terminal.
- Connect the Black wire (-) of power harness to the vehicle battery's negative terminal or an unpainted area on your vehicle's frame.



WARNING

Please ensure that the LED bars or strips/control box/wiring all are mounted in areas where will not exceed 85°C or 185°F

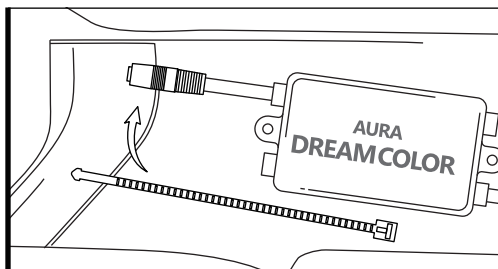


STEP 3

Secure control box in desired location with Velcro or zip ties.


***Ensure the control box is mounted away from water and heated metal surfaces for optimal performance.**

INSTALLATION

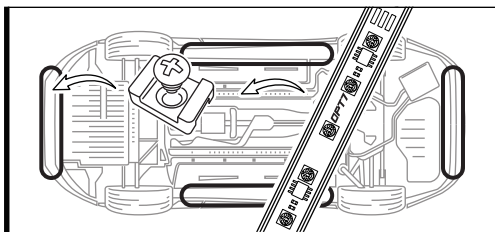


STEP 4

Mount brackets to secure the strips first.

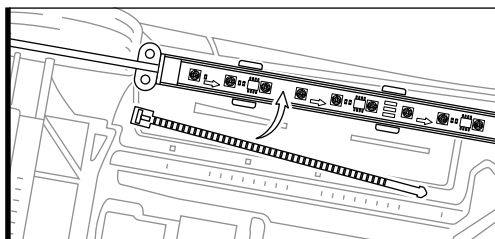

STEP 5

Secure the light strips using the zip ties to tie all the wiring away from the moving components.

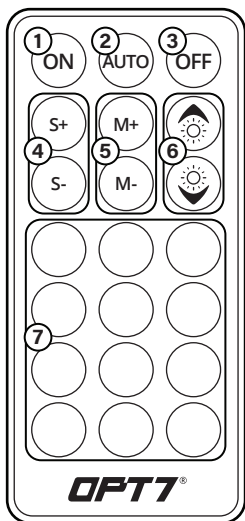


STEP 6

Using the included E-Z Remote, select your desired color or pattern.

- 1 | Power-ON
- 2 | Automatic Color Change
- 3 | Power-OFF
- 4 | Speed +/- **10 Levels**
- 5 | Mode +/- **24 Modes**
- 6 | Dimmer **10 Levels**
- 7 | Color Selection **12 Colors**

NOTE: When you use this product, stay within 10m/33ft from the control box.

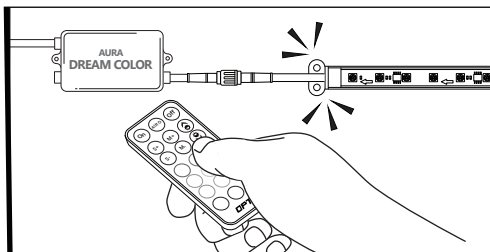

HOW TO PAIR THE REMOTE?

Pair the Device:

To pair the remote, reconnect the power, then aim the remote at the control box and hold the ON button until the LED strips flash white.

Unpair the Device:

To unpair the remote, reconnect the power, then aim the remote at the control box and hold the OFF button until the LED strips flash white.

| STEP 7

Please scan the QR code on the side of the control box and download the OPT7 PLUS App for the best experience.



Please scan to see the OPT7 PLUS user guide.

<https://support.opt-7.com/391968-OPT7-AURA-PLUS-Application-User-Guide>

DISCLAIMER

OPT7 Lighting is not liable for damages or personal injuries while installing this product. The Installation Guide is intended as assistance to reduce setup time. OPT7 Lighting assumes no responsibility for improper installation.

If you are unfamiliar with your vehicle or inexperienced with aftermarket upgrades, please seek professional assistance.

OPT7 recommends installation for safety and guidance.

Modified installations or installation recommendations not specified by OPT7 Lighting will void product warranty.